

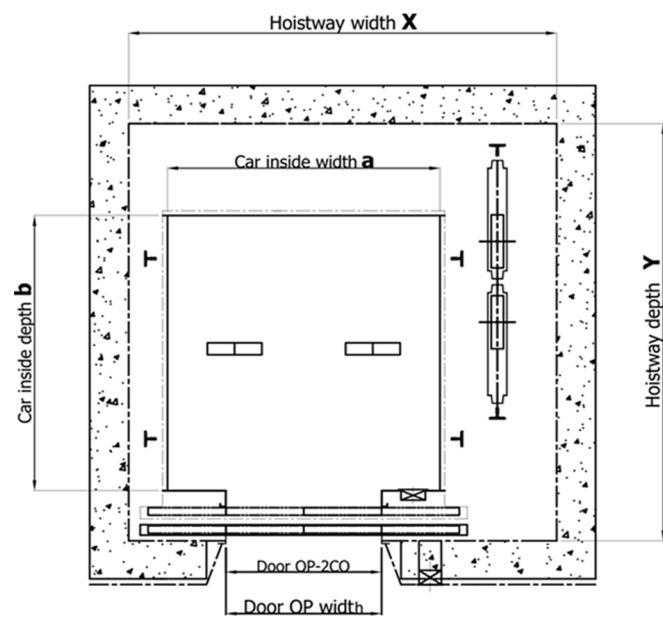


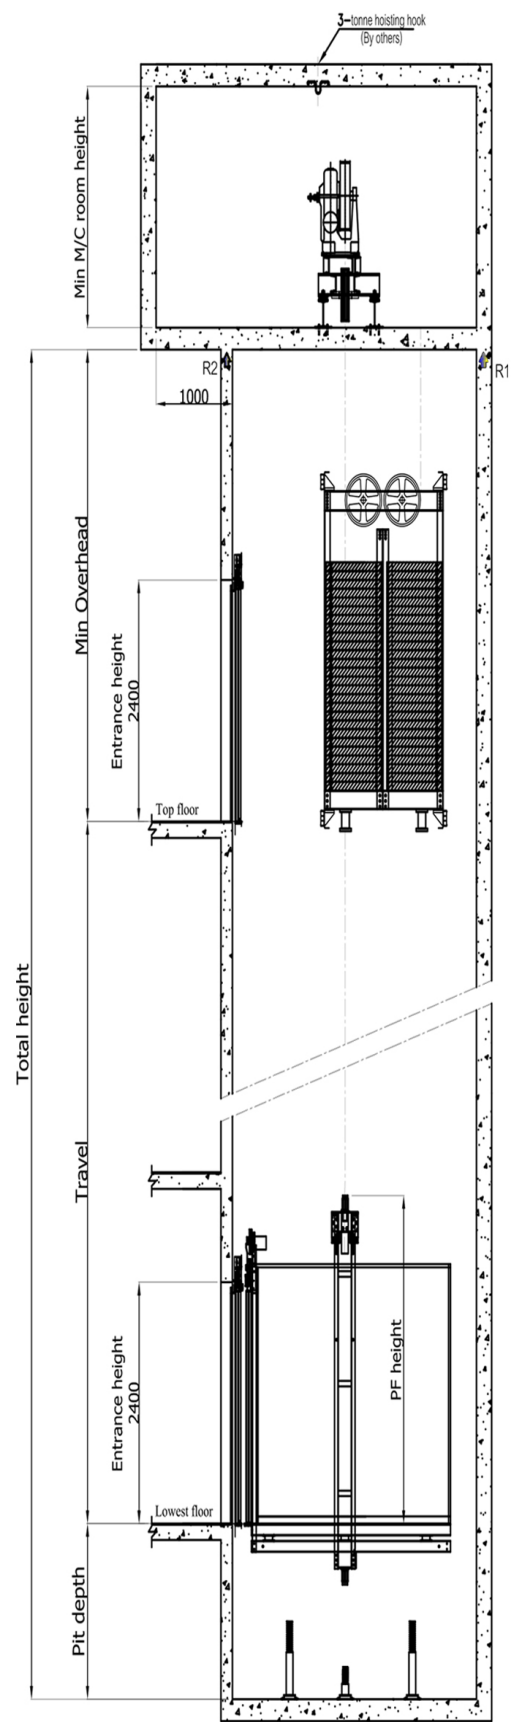

Entrance details
(For 4 panel center opening door)
Unit :mm

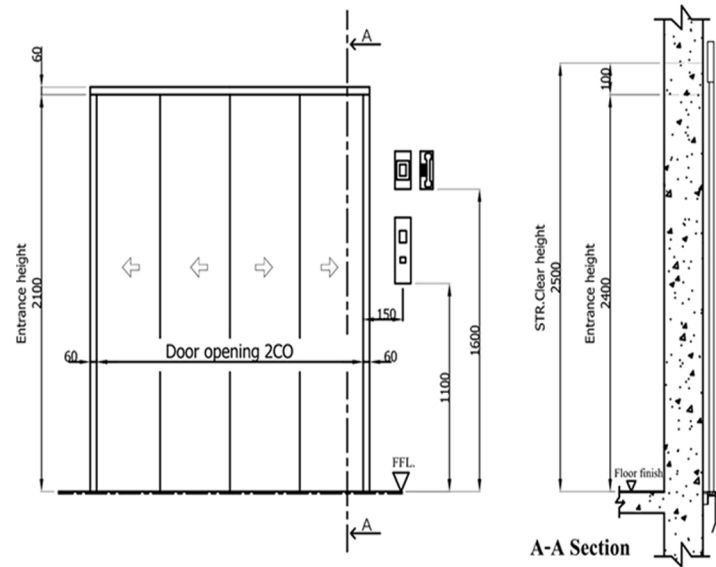

Freight Lift

No	Rated load (kg)	Persons	Rated speed m/s (m/min)	Model	Door OP width (mm)	Car inside a*b (mm)	Hoist way X*Y (mm)	Machine room A*B (mm)	Machine room reaction loading (kg)	
									R1	R2
1	2000	-	0.5(30)	T.J.E-2000-2CO30	2000	2400x2400	3800x3000	3800x4000	14000	11250
						2500x2500	3200x3500	3200x4500	17500	14500
2	3000	-	0.5(30)	T.J.E-3000-2CO30	2200	2500x3000	3600x4000	3600x5000	20700	14700
			0.5(30)			3000x4700	4000x6000	4000x7000	25500	16700
3	5000	-	0.5(30)	T.J.E-5000-2CO30	3000	3000x3700	5000x4500	5000x5500	27500	17500

Minimum dimensions for overhead height and pit depth, and other specifications

No	Rated speed (m/min)	Minimum overhead (mm)	Minimum pit depth (mm)	Maximum number of stops	Maximum Travel (m)	Minimum floor height (mm)
		JIS				
1	30	5000	1500	12	50	3500